


50-150W LED Post Top Light

Dimensions

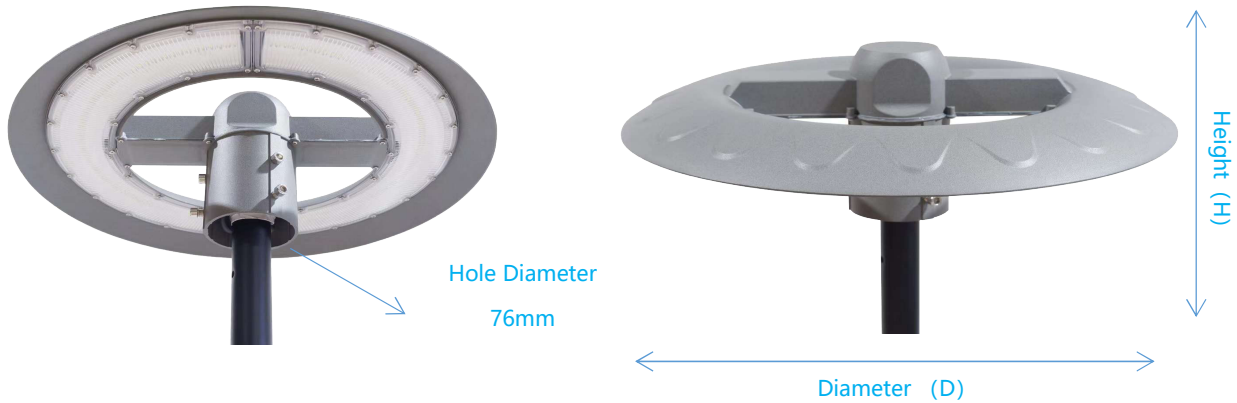

Technical Parameters

Item No.	Power(W)	Lumens (Lm)	Ra	Input(Vac)	Beam Angle(°)	CCT	Dimensions (mm)
100W-PSD1-NK	100	13000	> 80	90-277	120	30/40/50K	D480*H150
120W-PSD1-NK	120	15600	> 80	90-277	120	30/40/50K	D480*H150

Features

1. Original LED from CREE, OSRAM, high lumen output, Low depreciation
2. Die-casting aluminum housing with tempered PC lens, less heat dissipation
3. Energy saving, environment-friendly, over 80%.
4. Ensures beautiful illumination over a 50,000+ hour lifetime.
5. Customer Lighting Color available: Red, Green, Blue, Yellow, Pink or RGB
6. Protection Rate: IP 65, Easy installation.
7. Warranty: 5 years

Installation

1. Please read all installation instruction before attempting installation.
2. Lamps are designed to use direct AC power (120-277VAC, 50/60 Hz).
3. The LED lamp must work under the right voltage according to the specification.
4. Operating temperature range between -4°F and 122°F (-20°C and 50°C).

Applications

Perfect for Golf courses, airports, metro station, area roadway lighting, parking areas lighting, streetscape lighting, campuses lighting, other landscape light applications.

